


S2110

Singlemode SFP 100km

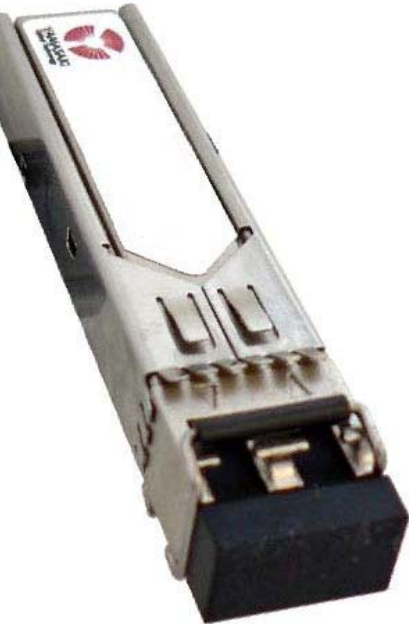

Singlemode SFP 100km Range

Reliable, Compatible and Cost Effective.

Yamasaki Singlemode Small Form Pluggable (SFP) transceiver modules are the perfect solution for connecting enterprise Gigabit Ethernet Switches and provide flexible fiber optic connectivity in Corporate, Metro, Campus backbone and workgroup switching Infrastructures. These SFP Transceivers are designed to work at speeds of up to 1.25 Gbps on Singlemode optical fiber networks and are capable of operating over extremely long distances.

Yamasaki's SFP units fully comply with Multi-Sourcing Agreement (MSA). This compliance allows Yamasaki's SFP modules to be used on other MSA-compliant SFP platforms without any problems.

FEATURES

- Max Range: 100 Kilometers
- Max Speed: 1.25Gbps
- Wavelength (λ) : 1550nm
- Fiber Types: Singlemode 9/125 μ m
- LC Fiber Optic Connector
- Gigabit Ethernet and Fiber Channel Compatible
- Digital Diagnostic Monitoring
- Class 1 Laser Safety Compliance
- Operating Temperature: 0 to 70°C
- Excellent EMI and ESD protection
- Meets Telcordia (Bellcore) reliability standards
- Compliant with SFP MSA specification
- CISCO® Compatible
- 3.3V Power Supply

Note. Some Yamasaki fiber optic laser products can cause eye damage if used incorrectly. Please consult your instruction manual and store away from children. Specifications and descriptions are subject to change without prior notice. CISCO and all other registered trademarks are the property of their respective owners.

www.yamasakiot.com

To contact us, please email: sales@yamasakiot.com

DEPENDABILITY & RELIABILITY IN ONE NAME



YAMASAKI
Optical Technology